


# WT-A4919-Q06

## Cavity Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency(F0)	1.715GHz
2	Pass Band Bandwidth	0.16GHz (1.635~1.795GHz)
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band Flatness	≤0.8dB
5	Pass Band VSWR	≤1.3:1
6	Stop Band Rejection	≥30dB @ DC~1.53GHz ≥30dB @ 1.9~3.0GHz
7	Impedance	50 ohms
8	Power Handling	≤5W
9	Connectors	SMA-Female
10	Surface Finish	Black Paint
11	Temperature Range	-30℃~+70℃
12	Net Weight	0.09 KG
13	Configuration	As Below (Size Unit: mm)

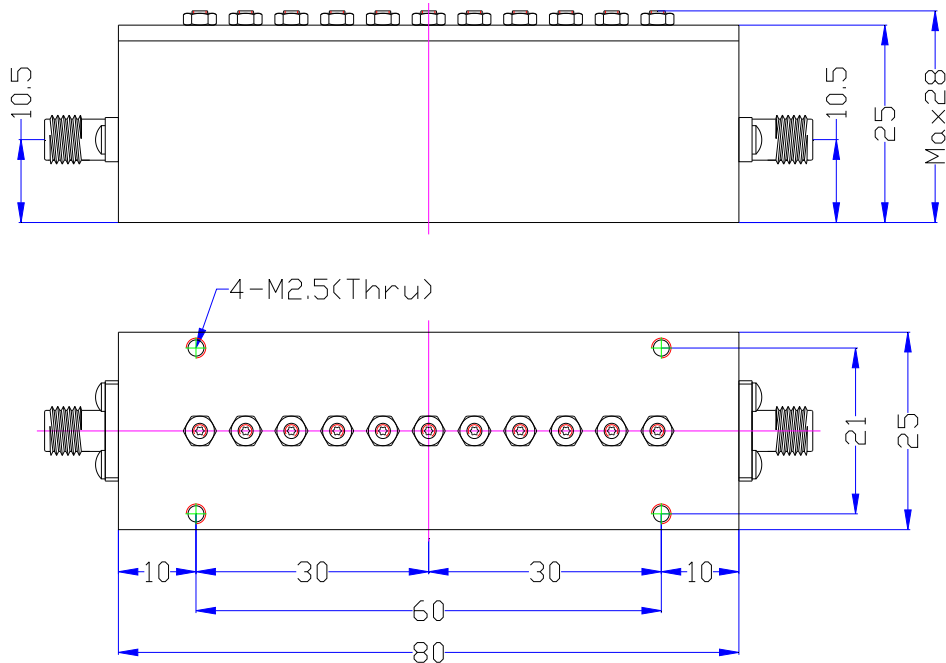

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: [tech@wtmicrowave.com](mailto:tech@wtmicrowave.com) [sales@wtmicrowave.com](mailto:sales@wtmicrowave.com)

<http://www.cdweitong.com> E-mail: [tech@cdweitong.com](mailto:tech@cdweitong.com) [sales@cdweitong.com](mailto:sales@cdweitong.com)

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051